查询SW11-200-24供应商

Size: 3.0 x 3.0 x 0.375 inches

25 Watt Single, Dual and Triple Output — K Series

T-57-11
T-57-05

- Regulated outputs
- Pi input filter
- Continuous short circuit protection
- MOSFET Design
- 500 VDC I/O isolation
- SMT - surface mount technology

Input Voltage Range VDC	Output Voltage	Output Current	Regulation % Line ±	Regulation % Load ±	Case	Model Number
9 - 36	5 V	5.0 A	0.3%	0.5%	15	K11-500-48
9 - 36	12 V	2.1 A				K12-210-48
9 - 36	15 V	1.65 A				K13-165-48
9 - 36	±12 V	1.0 A			15	K22-200-48
9 - 36	±15 V	0.8 A				K23-160-48
9 - 36	5±12 V	3.5 A ±300 mA	0.25/3.0	0.5/3.0	15	K34-410-48
9 - 36	5±15 V	3.5 A ±250 mA				K35-400-48

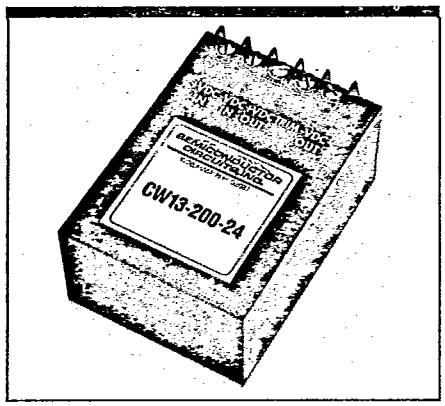

Case Size: See Page 12

10 to 42 Watt Single Output — SW/CW Series

- Regulated outputs
- Continuous short circuit protection
- Efficiency 80% (typ)
- Non-isolated

Input Voltage Range VDC	Output Voltage	Output Current	Regulation % Line ±	Regulation % Load ±	Case	Model Number
9.5 - 18	5 VDC	2.0 A	0.5	0.5	5C	SW11-200-12
9.5 - 18					8B	CW11-200-12
18 - 32					7C	SW11-200-24
18 - 32					8B	CW11-200-24
9.5 - 18		3.0 A			9B	SW11-300-12
9.5 - 18					8C	CW11-300-12
18 - 32					9B	SW11-300-24
18 - 32					8C	CW11-300-24
9.5 - 18		4.0 A			9B	SW11-400-12
9.5 - 18					8C	CW11-400-12
18 - 32					9B	SW11-400-24
18 - 32					8C	CW11-400-24
9.5 - 18		6.5 A			8D	CW11-650-12
18 - 32					8D	CW11-650-24
9.5 - 18		8.0 A			8D	CW11-800-12
18 - 32					8D	CW11-800-24
18 - 32	12 VDC	2.0 A	0.5	0.5	7C	SW12-200-24
18 - 32					8C	CW12-200-24
18 - 32		3.5 A			9D	SW12-350-24
18 - 32					8D	CW12-350-24
18 - 32	15 VDC	2.0 A	0.5	0.5	7C	SW13-200-24
18 - 32					8C	CW13-200-24

AC/DC Power Supplies

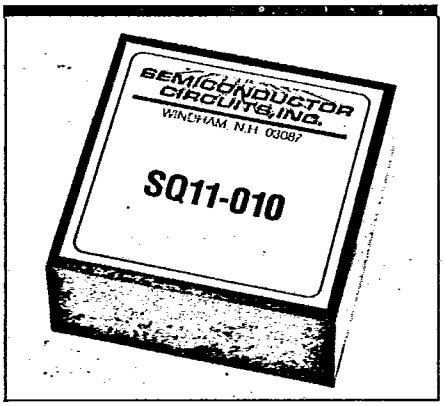

Case Size: See Page 12

1 to 7 Watt Single, Dual and Triple Output — MP/SQ Series

- 110/220 V inputs, 50 to 440 Hz
- Continuous short circuit protection with auto restart
- High performance design

Output Voltage	Output Current	Regulation % Line ±	Regulation % Load ±	Case	Model Number
5 V	200 mA	0.25	0.40	5C	SQ11-020
	500 mA			7	SQ11-050
12 V	100 mA			5C	SQ12-010
±12 V	±50 mA	0.25	0.25	5C	SQ22-010
	±100 mA			7	SQ22-020
±15 V	±35 mA	0.25	0.25	5C	SQ23-006
	±50 mA			5C	SQ23-010
	±100 mA			7	SQ23-020
+5 V/±12 V	+650/±150 mA	0.01	0.02	12B	MP34-060
	+500/±100 mA			12B	MP34-070
+5 V/±15 V	+300/±150 mA	0.01	0.02	12B	MP35-060
	+500/±100 mA			12B	MP35-070
	+750/±100 mA			12C	MP35-095

Optional inputs available: 90 - 110 VAC, 50 to 60 Hz - Add Suffix N
210 - 250 VAC, 50 to 60 Hz - Add Suffix K
105-125/210-250 VAC, 50 to 60 Hz - Add Suffix K2

Case Dimensions

T-90-20



Case 1



Case 2

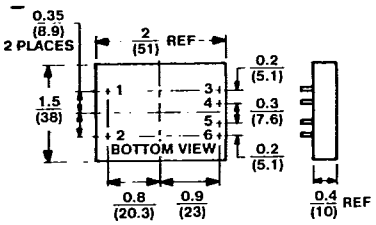

Case 3

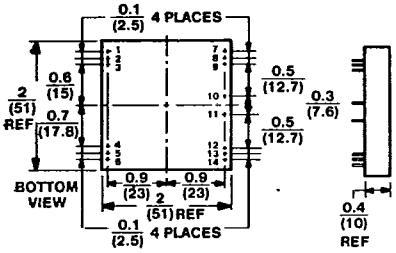

Case 4



Case 5



Case 6



Case 7



Case 8



Case 9

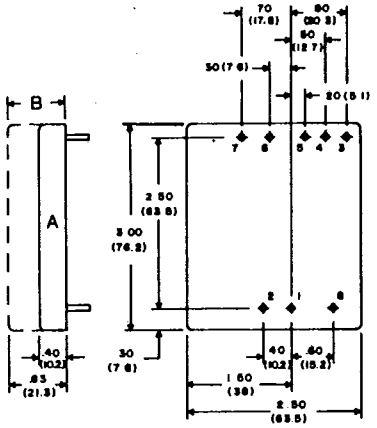

Case 10

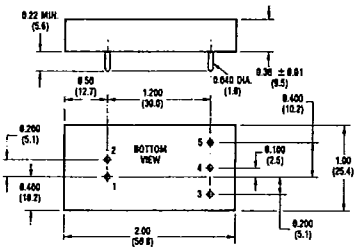

Case 11-1

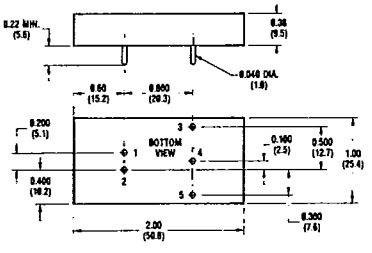

Case 11-2



Case 14



Case 15



Case 12



Case 9



SEMICONDUCTOR CIRCUITS, INC.
SUBSIDIARY OF EMERSON ELECTRIC CO.
49 Range Road
Windham, NH 03087
(603) 893-2330
FAX (603) 893-6280

All specifications subject to change without notice.